


# Ultra-Small Ceramic Power Splitter/Combiner

## QCN-45D+

2 Way-90° 50Ω 2500 to 4500 MHz



Generic photo used for illustration purposes only  
CASE STYLE: FV1206-1

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

\* Derate linearly to 7W at 100°C ambient.  
Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

### Features

- wide band, 2500-4500 MHz
- low insertion loss, 0.4 dB typ.
- wrap-around terminal for excellent solderability
- ultra small, 0.12"X0.06"X0.035"
- patent pending

### Applications

- balanced amplifiers
- modulators
- MMDS
- defense communications

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost  
Reel Size Devices/Reel  
7" 20, 50, 100, 200, 500, 1000, 3000

### Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		VSWR (:1)
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.
2500-4500									
2500-3500	22	16	0.4	0.7	1	4	0.5	1.7	1.2
3500-4500	19	15	0.5	0.8	3	6	1.0	2.1	1.2


1. For applications requiring DC voltage to be applied to the RF ports. DC resistance to ground is 100 Mohms min.

### Typical Performance Data


Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
2500.00	3.04	3.82	0.78	18.35	88.41	1.20	1.21	1.26
2600.00	3.14	3.68	0.54	18.66	88.69	1.19	1.18	1.24
2800.00	3.36	3.44	0.09	19.11	89.21	1.18	1.13	1.20
2900.00	3.46	3.35	0.11	19.15	89.40	1.19	1.11	1.18
3100.00	3.64	3.20	0.44	19.20	89.79	1.22	1.08	1.17
3200.00	3.72	3.14	0.57	19.10	89.97	1.22	1.08	1.16
3400.00	3.86	3.06	0.80	18.69	90.28	1.25	1.08	1.12
3500.00	3.93	3.03	0.90	18.48	90.38	1.27	1.09	1.11
3600.00	3.99	3.02	0.97	18.13	90.47	1.29	1.10	1.12
3800.00	4.09	3.00	1.09	17.47	90.65	1.32	1.11	1.12
4000.00	4.15	3.00	1.15	16.86	90.87	1.33	1.12	1.12
4100.00	4.16	3.00	1.16	16.63	90.98	1.34	1.12	1.13
4200.00	4.17	3.02	1.15	16.38	91.08	1.35	1.12	1.13
4300.00	4.17	3.05	1.13	16.23	91.21	1.35	1.13	1.14
4500.00	4.13	3.12	1.01	16.03	91.48	1.36	1.13	1.13

1. Total Loss = Insertion Loss + 3dB splitter loss.

### Outline Drawing



### PCB Land Pattern




### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28

G	H	J	K	wt
.039	.024	.042	.123	grams
0.99	0.61	1.07	3.12	.020

### Demo Board MCL P/N: TB-405 Suggested PCB Layout (PL-250)



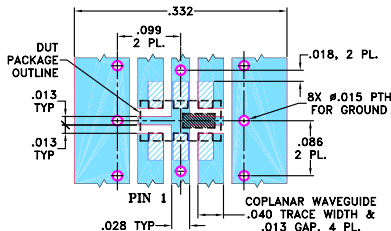


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

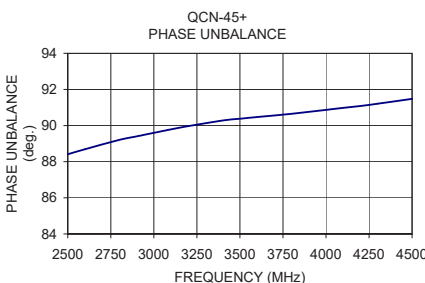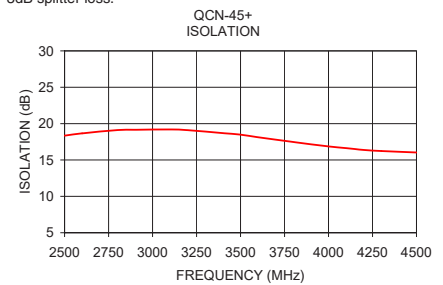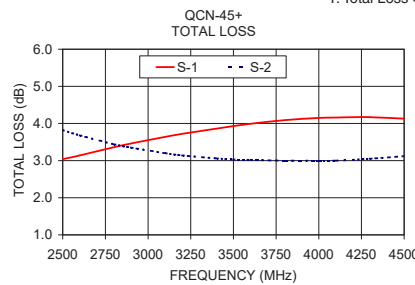

### electrical schematic (Note 1)

