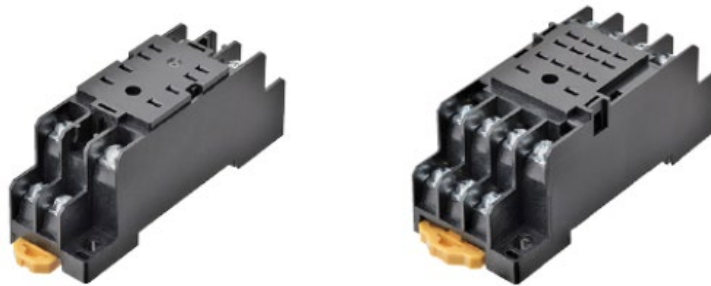


NO: RL-176
DATE: May 2020

PRODUCT: PYF series socket
TYPE: Discontinuation Notice

Discontinuation notice of PYF series sockets for MY(S) relays



Product Discontinuation

Common sockets

Model PYF08A Series
Model PYF08A-E
Model PYF14A Series
Model PYF14A-E



Recommended Replacement

Common sockets

Model PYFZ-08 series
Model PYFZ-08-E
Model PYFZ-14 series
Model PYFZ-14-E

Discontinuation Date: March 2021

[Final order entry date]

The end of March, 2021

[Last shipping date]

The end of June, 2021

[Difference from discontinued product]

Recommended replacement Model	Body Color	Dimensions	Wire connection	Mounting Dimensions	Characteristics	Operation ratings	Operation methods
PYFZ-08 series	**	**	**	**	**	-	-
PYFZ-08-E	**	**	**	**	**	-	-
PYFZ-14 series	**	**	**	**	**	-	-
PYFZ-14-E	**	**	**	**	**	-	-

** : Compatible

* : The change is a little/Almost compatible





-- : Not compatible

- : No corresponding specification

Product Discontinuation and recommended replacement

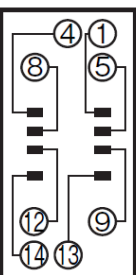
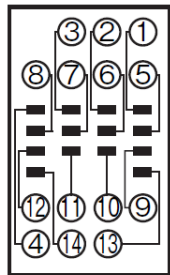
Product discontinuation	Recommended replacement
PYF08A	PYFZ-08
PYF08A-E	PYFZ-08-E
PYF08A-TU	PYFZ-08-TU
PYF08A-W	PYFZ-08-W
PYF14A	PYFZ-14
PYF14A-C	PYFZ-14-C
PYF14A-E	PYFZ-14-E
PYF14A-E-US	No recommended replacement
PYF14A-TU	PYFZ-14-TU

Body color

Product discontinuation Model PYF08A series, PYF08A-E Model PYF14A series, PYF14A-E	Recommendable replacement Model PYFZ-08 series, PYFZ-08-E Model PYFZ-14 series, PYFZ-14-E
<p>Body color : Black PYF08A series PYFZ-08 series</p>  <p>*Photo : PYFZ series</p>	<p>Body color : Black PYF14A series PYFZ-14 series</p>  <p>*Photo : PYFZ series</p>
<p>Body color : Black PYF08A-E PYFZ-08-E</p>  <p>*Photo : PYFZ series</p>	<p>Body color : Black PYF14A-E PYFZ-14-E</p>  <p>*Photo : PYFZ series</p>

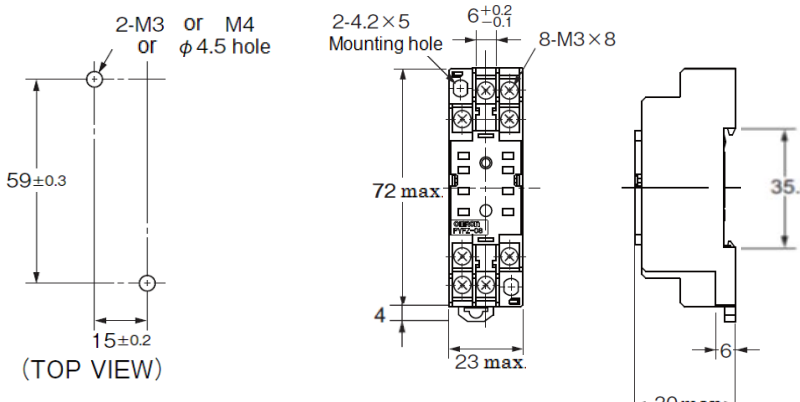
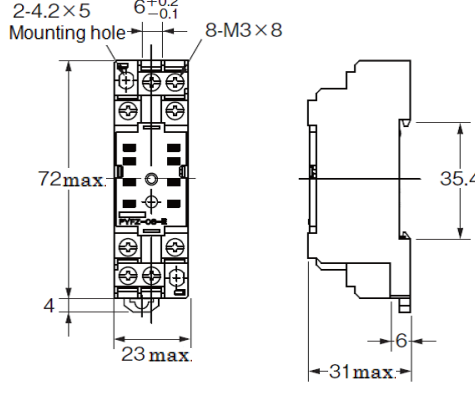
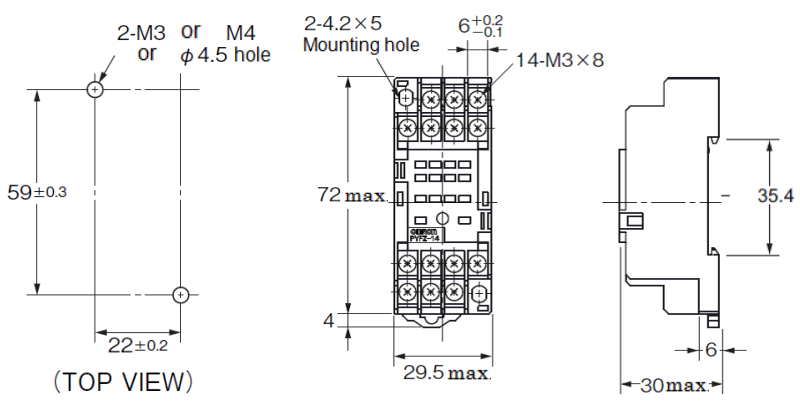
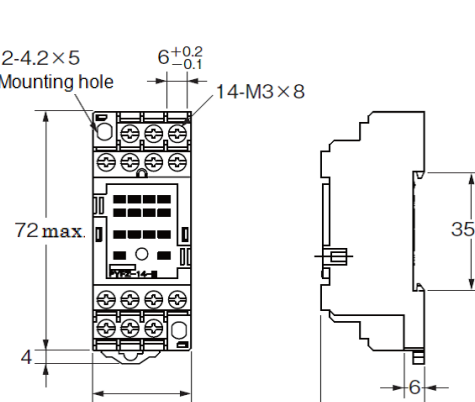
No changing

Wire connection

Product discontinuation Model PYF08A series, PYF08A-E Model PYF14A series, PYF14A-E	Recommendable replacement Model PYFZ-08 series, PYFZ-08-E Model PYFZ-14 series, PYFZ-14-E
<p>PYF08A series, PYF08A-E PYFZ-08 series, PYFZ-08-E</p>  <p>(TOP VIEW)</p>	<p>PYF14A series, PYF14A-E PYFZ-14 series, PYFZ-14-E</p>  <p>(TOP VIEW)</p>

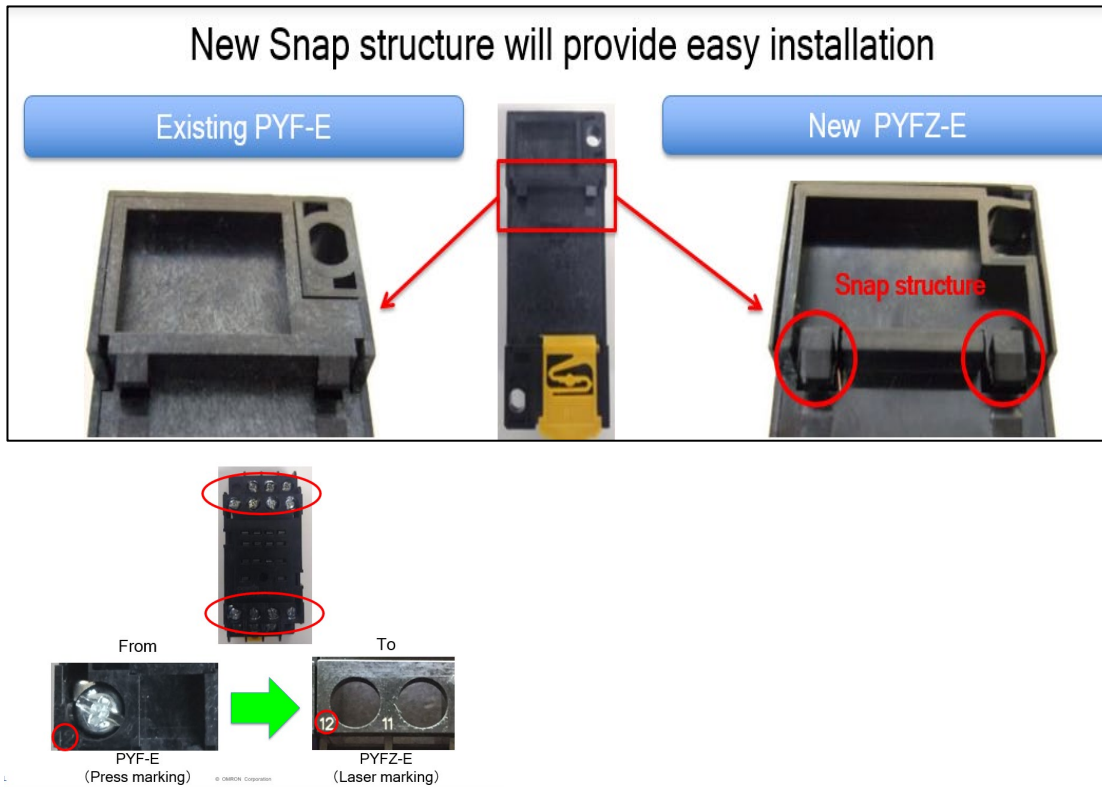
No changing

Mounting dimensions

Product discontinuation Model PYF08A series, PYF08A-E Model PYF14A series, PYF14A-E	Recommendable replacement Model PYFZ-08 series, PYFZ-08-E Model PYFZ-14 series, PYFZ-14-E
No changing	
<p> Mounting hole PYF08A series PYF08A-E PYFZ-08 serie PYFZ-08-E </p> 	<p> Screw wiring/Fixture rail/Dimensions PYF08A series PYFZ-08 series </p> 
<p> Mounting hole PYF14A series PYF14A-E PYFZ-14 serie PYFZ-14-E </p> 	<p> Screw wiring/Fixture rail/Dimensions PYF14A series PYFZ-14 series </p> 

Characteristics

Item	Product discontinuation Model PYF08A series, PYF08A-E Model PYF14A series, PYF14A-E	Recommendable replacement Model PYFZ-08 series, PYFZ-08-E Model PYFZ-14 series, PYFZ-14-E
Ambient using temperature	-55~+70°C	
Ambient using humidity	5~85%RH	
Rated carry current	PYF08A series, PYF08A-E : 7A PYF14A series, PYF14A-E : 3A	PYFZ-08 series, PYFZ-08-E : 10A PYFZ-14 series, PYFZ-14-E : 6A
Dielectric strength	Between same pole contact : AC2,000V/1min Between different pole contact : AC2,000V/1min Between coil and contact : AC2,000V/1min	Between same pole contact : AC 2,250V /1min Between different pole contact : AC 2,250V /1min Between coil and contact : AC 2,250V /1min
Insulation resistance	1,000MΩMin. (DC500V)	
Weight	PYF08A series, PYF08A-E: Approx.32g PYF14A series, PYF14A-E: Approx.49g	PYFZ-08 series, PYFZ-08-E: Approx.32g PYFZ-14 series, PYFZ-14-E: Approx.50g
Safety standard certified	UL, CSA	UL, CSA, TUV



Specifications and prices in this product news are as of the issue date and are subject to change without notice. Only main changes in specifications are described in this document. Please be sure to read the relevant catalogs, datasheets, product specifications, instructions, and manuals for precautions and necessary information when using products.